


Remote control / Hand valve

The advantages and disadvantages of the remote control are explained with the example of the accu device Kombi 7011-DS. This can be applied to all other accumulator operated vacuum lifting devices.



Control via the hand valve

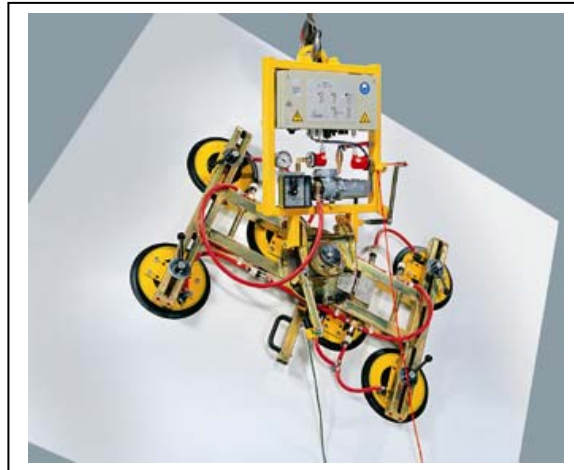

Advantage	Disadvantage
works without mains supply	position of the operation not changeable
longer working with the charged accumulator	more difficult to operate at larger dimensions of the transport load
simple execution	

Control via the cable remote control



Advantage	Disadvantage
position of the operation changeable	does not work without mains supply
easier to operate at larger dimensions of the transport load (in general is the cable length 2 m around the switch box)	shorter operation with the charged accumulator
detachable cable remote control	disturbing cable with the danger to get caught
switch condition recognizable via the position of the mushroom shaped key	fastening of the housing on longer transport distances a loose hanging remote control can lead to misoperation
switch condition recognizable via the position of the mushroom shaped key	slightly proud mushroom shaped key
hand made robust housing for the operation key	
screwed down with the device via a screw-type locking connector (cannot be lost easily)	

Control via the infrared remote control



Advantage	Disadvantage
position of the operation changeable	does not work without mains supply
easier to operate at larger dimensions of the transport load (approx. 6 m around the switch box)	shorter operation with the charged accumulator
no disturbing cable no danger of getting caught	switch condition at the remote control not recognizable
detachable infrared remote control	battery for the sender necessary (replacement approx. each year)
simple change between infrared remote control and cable remote control	sender is not fastened to the device sender can get lost or can be forgotten
no loose hanging remote control, which could lead to misoperations	
hand made robust housing for the operation key	
no proud operating parts at the housing	