
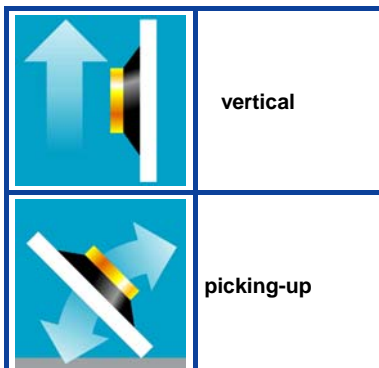
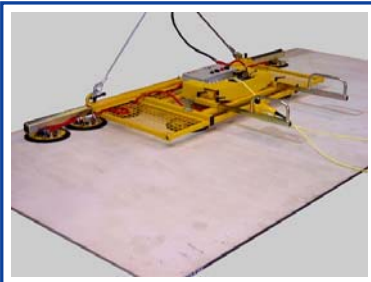


Frame 7000-AB

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155**

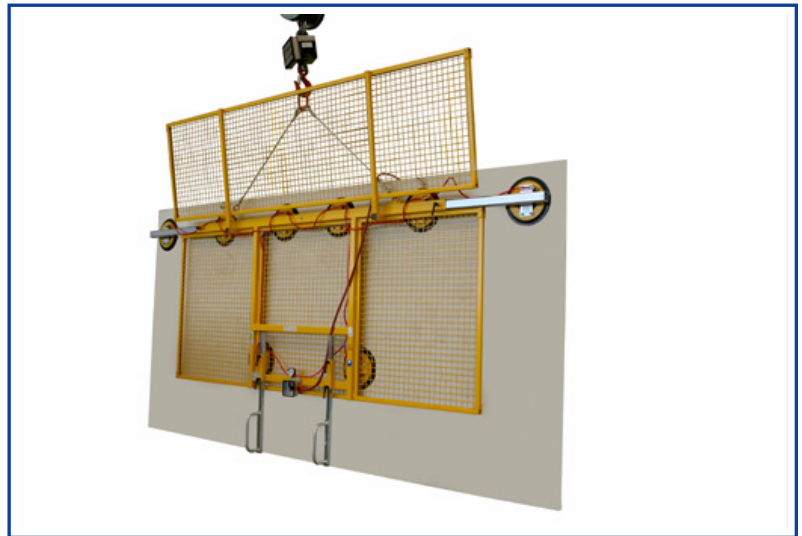

for vertical lifting and transporting
the **perfect** device for the warehouse

Description

- **1-circuit vacuum system**
- control vacuum meter on the device
- single row arrangement of suction cups with additional supporting suction cups
- suction cups fixed directly on the frame
- outer suction cup distance adjustable via moving of the carrying bars
- outer suction cups lockable
- modular device construction
- vertical transport approx. 85°
- guide handles are adjustable in the height

Vacuum Generation

- external vacuum generation necessary
e. g. via a Pannkoke Compound Pump 7002-COMP2 in the craneway

Control Means

- **SUCTION/RELEASE** via hand valve at the device or via remote control of the vacuum generation

Suspension:

Safe Working Load:

Colour:

1500 kg
yellow / partly zinked

The turnable suspension allows the picking-up/depositing of large sheets (horizontal to vertical/vertical to horizontal).

suitable for lifting			
material properties	gas-tight		
surface	smooth		
e. g.	glass panes, insulation glass units, plastic and ceramic plates, coated boards		
suction cup type	388		
diameter in action approx. mm	300		
quality of suction cups	black rubber abrasion possible up to 100° C heat resistant		
number of suction cups	6	10	16
carrying bar length			
minimum approx. mm	2900	2900	3400
maximum approx. mm	3500	3500	4200
safe working load on smooth and clean surface at 60 % vacuum kg	500	1000	1500
dead weight approx. kg	90	110	
vacuum infeed connection	9 mm		
Item No.: 7000-AB...	06-0910	10-0910	16-0910
Special Design	on request		
Accessories on request			
Item No.: 388-SCHUTZ	protection cap for suction cup 388		
Item No.: 7003-SchutzAB	guard grating (size in accordance to your requirement)		
Item No.: 7003-UStAB	support for just sealed units (size in accordance to your requirement)		

