

Safety Suction Handle 290M-388


the ideal suction handle for mounting / lifting

for materials with flat and gas-tight surfaces such as glass, plastic, coated wood, marble, etc.

Main features:

- carrying capacity: max. 100 kg (safety factor 2)
- diameter of suction cup: approx. 300 mm
- control vacuum meter
- safety suction handle with manual vacuum pump
- execution:
various rubber mixtures according to your required application
(see reverse side)



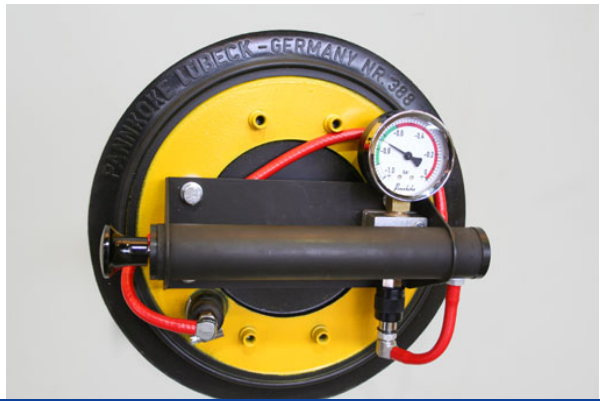

Safety Suction Handle 290M-388

- black rubber
- abrasion possible
- heat resistant from -2 up to 80 centigrade
- non oil resistant
- **only useable for glass with a thickness of 4 mm or more.**
- **carrying capacity: 100 kg (safety factor 2)**



Safety Suction Handle 290M-388K

- rubber red – **softer rubber compound**
- abrasion possible
- heat resistant from -2 up to 80 centigrade
- non oil resistant
- **only useable for glass with a thickness of 3 mm or more.**
- **carrying capacity: 100 kg (safety factor 2)**



Safety Suction Handle 290M-388TR

- **small abrasion**
- rubber ivory-coloured
- abrasion possible
- heat resistant from -2 up to 80 centigrade
- non oil resistant
- **only useable for glass with a thickness of 4 mm or more.**
- **carrying capacity: 80 kg (safety factor 2)**

Safety Suction Handle 290M-388WF

- **small abrasion**
- rubber grey (**silicone rubber**)
- abrasion possible
- **heat resistant from -20 up to 160 centigrade**
- **oil-resistant**
- **only useable for glass with a thickness of 4 mm or more.**
- **carrying capacity: 80 kg (safety factor 2)**