
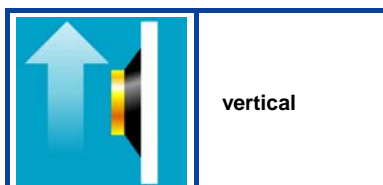


Kombi 7011-BUS 2

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155.**

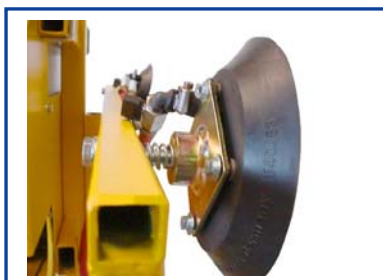

for glazing of bus wind screens in the workshop area

Description

- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit** prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- multiple row arrangement of suction cups
- suction cups fixed with movable suspension directly on the frame
- distance of suction cups cannot be adjusted
- angle of inclination adjustable via spindle
- modular device construction

Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

Control Means

- ON/OFF directly at the device
- SUCTION/RELEASE via cable remote control optional

Suspension: adjustable crane eye at adjustable suspension bar

Safe Working Load: 240 kg

Colour: yellow

suitable for lifting	
material properties	gastight
surface	smooth, slightly structural
e. g.	bus or truck wind screens
suction cup type	540
diameter in action approx. mm	200
suction cup quality	rubber black abrasion possible upto 100° heat resistance
number of suction cups	6
safe working load on smooth and clean surface at 60 % vacuum	kg 240
frame size approx. mm	1030 x 970
dead weight approx. kg	
output	1,5 m³/h
voltage charger for battery	230 Volts 50 Hz
item-no.: 7011-BUS2...	12-0920
voltage charger for battery	110 Volts 50 Hz
item-no.: 7011-BUS2-110V...	06-0920
Special Design and Special Voltage	on request
Accessories on request	
item-no.: 540-SCHUTZ	protection cap for suction cup 540
item-no.: 7003-DSFUS2	infrared remote control → SUCTION/RELEASE
item-no.: 7003-DSFUST	infrared remote control → SUCTION/RELEASE only outside the EC

Also available as 2-circuit vacuum lifting device (Type 7211-BUS)
in accordance to EN 13155 / prEN 13035.

