

Accu Device Kombi 7011-D

in
Special Design

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155.**



**for planar stabilized, vertical
lifting and transporting
turning through max. 330 degrees
the simple, mains-independent compact device**

Description

- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit** prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- multiple row arrangement of suction cups
- suction cups fixed directly on the frame
- distance of suction cups cannot be adjusted
- replaceable suspension bar in several lengths available
- detachable extension


Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

Control Means

- ON/OFF directly at the device
- SUCTION/RELEASE via hand valve at the device
optional
via cable remote control
optional
via infrared remote control

Suspension: replaceable suspension bar
Safe Working Load: 1000 kg
Colour: yellow

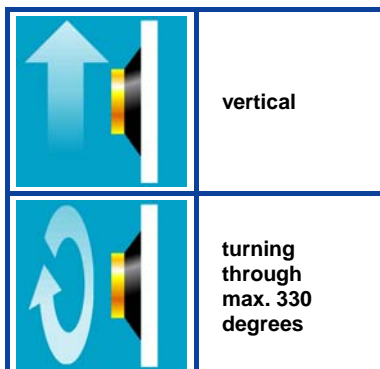

suitable for lifting			
material properties	gastight		
surface	smooth		
e. g.	glass, plastic boards, ceramic plates, sheets metal, coated boards		
suction cup type	388		
diameter in action approx. mm	300		
suction cup quality	rubber black abrasion possible upto 100° heat resistance		
number of suction cups	6	8	12
fundamental frame			
number of suction cups	2	3	3
of each extension			
distance between the suction cups approx. mm	4000 x 800	4000 x 800	4000 x 800
fundamental frame			
distance between the suction cups approx. mm	5500 x 800	5500 x 800	5500 x 800
fundamental frame + extensions			
safe working load on smooth and clean surface at 60 % vacuum	kg		
	600	600	800
suspension bar approx. mm long	1250	800	1000
dead weight approx. kg			
output	1,5 m³/h		
voltage charger for battery	230 Volts 50/60 Hz 1 Ph		
item-no.: 7011-D_SO05...	6-0910	8-0910	12-0910

voltage charger for battery	110 Volts 50/60 Hz 1 Ph		
item-no.: 7011-D_SO05...	6-0910-110	8-0910-110	12-0910-110

other frame sizes	on request		
--------------------------	-------------------	--	--

Accessories on request

item-no.: 388-SCHUTZ	protection cap for suction cup 388
item-no.: 7003-BK/DS	cable remote control → SUCTION/RELEASE
item-no.: 7003-IR2S	infrared remote control → SUCTION/RELEASE
item-no.: 7003-BF/DS	infrared remote control → SUCTION/RELEASE only outside the EC

Also available as 2-circuit vacuum lifting device (Type 7211-D SO05)
in accordance to EN 13155 / prEN 13035.

