

## Accu Device Kombi 7011-D43 SO01

**For operation on  
EC construction sites only  
permissible with  
mechanical holding device  
according to  
EN 13155.**



**for vertical lifting and transporting  
of window elements with roller shutters and  
manual turning through max. 300 degrees**

### Description

- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit**  
prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- multiple row arrangement of suction cups
- suction cups fixed with movable suspension directly on the frame
- distance of suction cups can be adjusted
- all suction cups lockable individually
- turning device  
with ball bearing turning bolt and locking device every 30°

### Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose


### Control Means

- ON/OFF directly at the device
- SUCTION/RELEASE via hand valve at the device  
optional  
via cable remote control  
optional  
via infrared remote control

**Suspension:** replaceable suspension bar

**Safe Working Load:** 800 kg

**Colour:** yellow / partly zinked

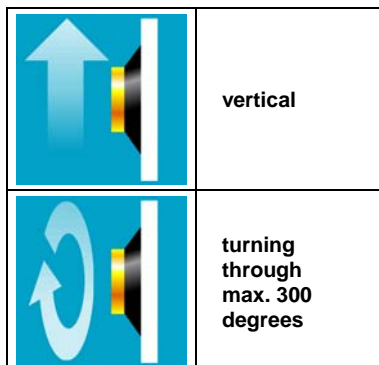

<b>suitable for lifting</b>				
material properties	gastight			
surface	smooth			
e. g.	window elements with roller shutters, but also: glass, plastic boards, ceramic plates, sheets metal, coated boards			
<b>suction cup type</b>	<b>388</b>			
<b>diameter</b> in action approx. mm	300			
<b>suction cup quality</b>	rubber black abrasion possible upto 100° heat resistance			
<b>number of suction cups</b>	4	6	8	10
<b>distance between the suction cups</b> approx. mm	750 x 750	720 x 1200	1200 x 1200	720 x 3000
<b>safe working load</b> on smooth and clean surface at 60 % vacuum kg	400	600	800	800
<b>suspension bar</b> approx. mm long				
<b>dead weight</b> approx. kg				
<b>structural depth</b> approx. mm				
<b>output</b>	1,5 m³/h			
<b>voltage</b> charger for battery	230 Volts 50/60 Hz 1 Ph			
<b>item-no.: 7011-D43...</b>	<b>4-0910</b>	<b>6-0910</b>	<b>8-0910</b>	<b>10-0910</b>
<b>voltage</b> charger for battery	110 Volts 50/60 Hz 1 Ph			
<b>item-no.: 7011-D43...</b>	<b>4-0910-110</b>	<b>6-0910-110</b>	<b>8-0910-110</b>	<b>10-0910-110</b>
<b>other frame sizes</b>	on request			
<b>Accessories on request</b>				
<b>item-no.: 388-SCHUTZ</b>	protection cap for suction cup 388			
<b>item-no.: 7003-BK/DS</b>	cable remote control → SUCTION/RELEASE			
<b>item-no.: 7003-IR2S</b>	infrared remote control → SUCTION/RELEASE			
<b>item-no.: 7003-BF/DS</b>	infrared remote control → SUCTION/RELEASE <b>only outside the EC</b>			

**Also available as 2-circuit vacuum lifting device (Type 7211-D43 SO01)  
in accordance to EN 13155 / prEN 13035.**