


## Accu Device Kombi 7011-DS

in  
Special Design

**For operation on  
EC construction sites only  
permissible with  
mechanical holding device  
according to  
EN 13155.**

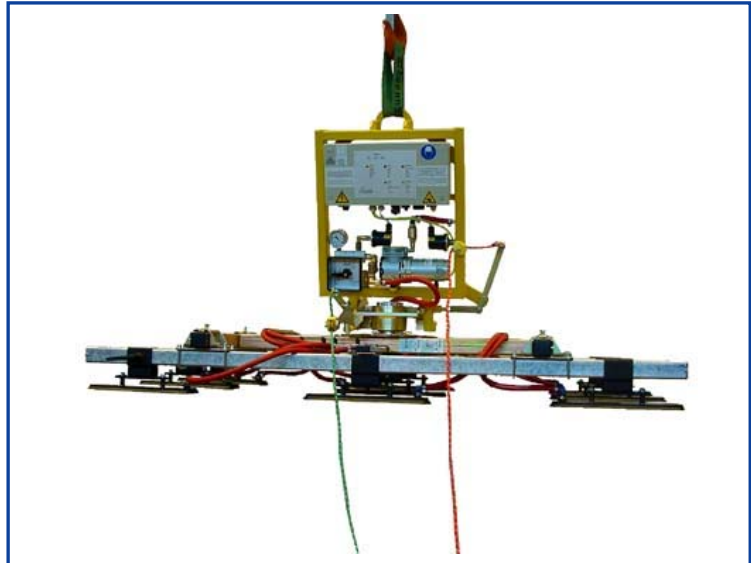

**for planar stabilized, vertical lifting and transporting  
manual turning through 2 x 90 degrees  
manual tilting through 90 degrees**

the perfect equipment for warehouse and construction site

### Description





- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit**  
prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- multiple row arrangement of suction cups
- suction cups fixed with movable suspension directly on the frame
- distance of suction cups can be adjusted
- all suction cups lockable individually
- turning device (-90°/0°/+90°)  
with ball bearing turning bolt and locking device
- tilting device (0° to 90°) with locking device every 15°
- detachable extension available

### Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

### Control Means

- ON/OFF directly at the device
  - SUCTION/RELEASE via hand valve at the device  
optional  
via cable remote control  
optional  
via infrared remote control  
crane eye at the carrying frame
- Safe Working Load:** 250 kg  
**Colour:** yellow / partly zinked

	vertical
	horizontal
	turning through +/- 90 degrees
	tilting through 90 degrees

<b>suitable for lifting</b>	
material properties	gastight
surface	smooth
e. g.	glass panes, sealed units, plastic and ceramic plates, coated boards
<b>suction cup type</b>	<b>544-80</b>
<b>diameter</b> in action approx. mm	380 x 80
<b>suction cup quality</b>	rubber black abrasion possible upto 100° heat resistance
<b>number of suction cups</b>	9
<b>safe working load</b> on smooth and clean surface at 60 % vacuum	kg 250
<b>dead weight</b> approx. kg	
<b>frame size</b> approx. mm	
<b>structural depth</b> approx. mm	
<b>output</b>	1,5 m³/h
<b>voltage</b> charger for battery	230 Volts 50/60 Hz 1 Ph
<b>item-no.: 7011-DS_SO08-...</b>	<b>9</b>
<b>voltage</b> charger for battery	110 Volts 50/60 Hz 1 Ph
<b>item-no.: 7011-DS_SO08-...</b>	<b>9-110</b>
<b>other frame sizes</b>	on request
<b>Accessories on request</b>	
<b>item-no.: 544-80-SCH</b>	protection cap for suction cup 544-80
<b>item-no.: 7003-BK/DS</b>	cable remote control → SUCTION/RELEASE
<b>item-no.: 7003-IR2S</b>	infrared remote control → SUCTION/RELEASE
<b>item-no.: 7003-BF/DS</b>	infrared remote control → SUCTION/RELEASE <b>only outside the EC</b>

