
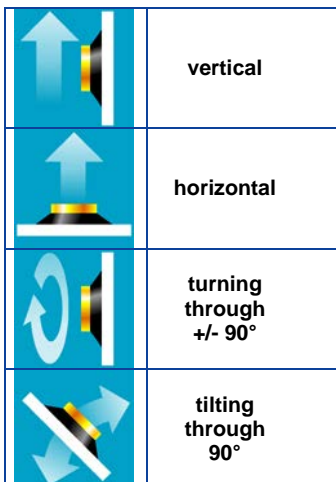
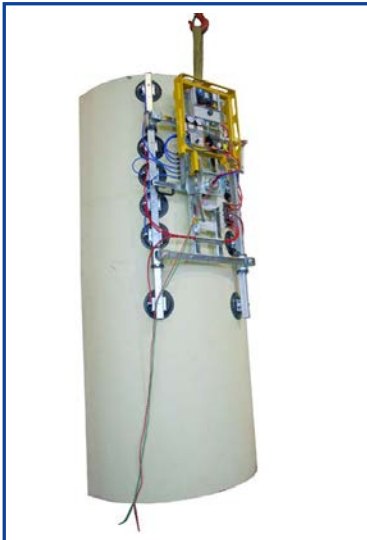


Accu-Device Kombi 7211-DSG5-2012

Developed for construction
site use within the EU
according to EN 13155

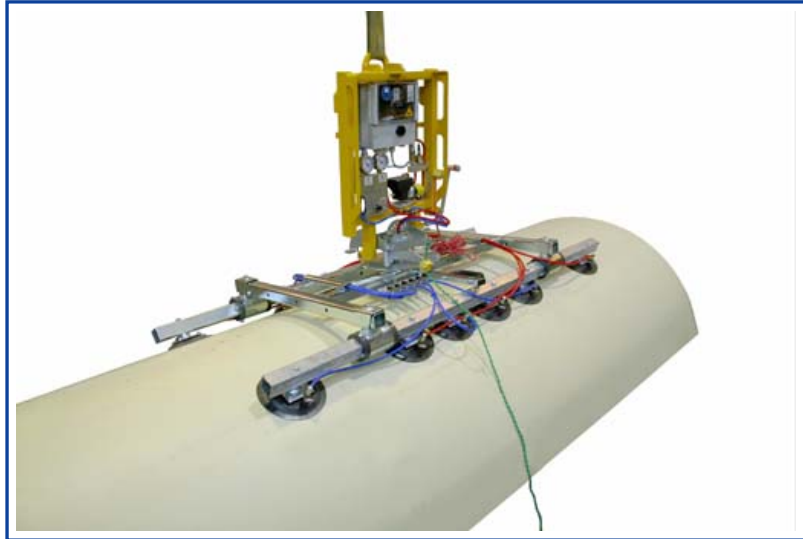

for lifting and transporting
convex and concave curved materials

Description

- **increased safety via 2 independent vacuum circuits**
- each vacuum circuit has a vacuum tank with non-return valve, vacuum switch and control vacuum meter
- **2 completely closed vacuum circuits**
prevent loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- carrying bars are turnable on bearings
for minimum radius of 750 mm
- all suction cups lockable individually
- turning device with roller bearings and locking (+90° / 0° / -90°)
- tilting device (0° to 90°) with locking device every 15°
- interchangeable suction frame – can be used several times

Vacuum generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for battery operation with quick-change device for short battery change times of less than one minute
- battery charger for charging second battery
- no cable - no hose

Operation

- ON/OFF directly at the device
- SUCTION/RELEASE via hand valve at the device
optional
via remote control
- TURNING tackle
- TILTING tackle

Suspension: crane eye at the carrying frame
Load capacity : 300 kg / 400 kg
Colour: yellow / partly zinked

suitable for lifting		
material properties	gas-tight	
surface	smooth convex or concave curve as well as plane parallel radius minimum 750 mm	
e. g.	glass panes, sealed units, window and curtain walling elements, plastic and ceramic plates, coated boards	
suction cup type	540	
diameter in action approx. mm	200	
quality of suction cups	black rubber abrasion possible up to 80° C heat resistant	
number of suction cups	2 x 8	2 x 12
safe working load on smooth and clean surface at 60 % vacuum		
at EC sites kg	300	400
in-company kg	400	400
outer distance of the suction cups approx. mm	2200 x 660/1000	2700 x 660/1000
dead weight approx. kg		
distribution voltage charger for battery	110 - 230 V / 50/60 Hz / 1 phase	
Item No.: 7211-DSG5-2012...	-16	-24
Accessories on request		
Item No.: 540-SCHUTZ	protection cap for suction cup 540	

