


Accu-Device Kombi 7011-DS7

**For operation on
EC construction sites only
permissible with mechanical
holding device according to
EN 13155**

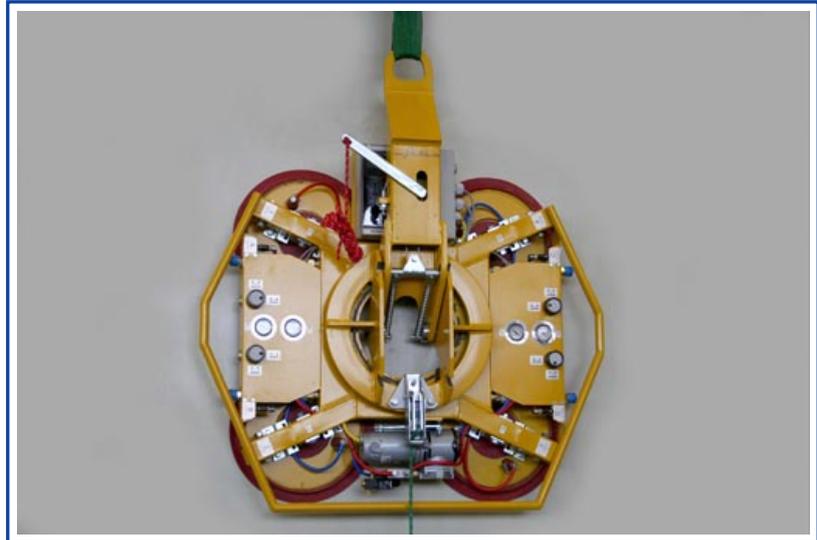

	vertical
	horizontal
	turning through +/- 360 degrees
	tilting through 90 degrees

Description

- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit**
prevents loss of vacuum at power failure
- acoustic signal indicates insufficient vacuum
- extendable to 8 suction cups with extensions
- all suction cups lockable individually
- turning device with roller bearings and locking every 90°
- tilting device (0° to 90°)
- **maximum structural depth 230 mm**
- extendable at maximum by 4 extensions

Vacuum Generation

- for battery operation with quick-change device for short battery change times of less than one minute
- battery charger for charging second battery
- no cable - no hose

Operation

- ON/OFF directly at the device
- SUCTION/RELEASE via hand valve at the device
- turning tackle
- tilting tackle

Suspension: crane eye at the carrying frame


Load capacity :

500 kg / 750 kg



Colour:

yellow / partly zinked



suitable for lifting				
material properties	gas-tight			
surface	smooth			
e. g.	glass panes, sealed units, window and curtain walling elements, plastic and ceramic plates, coated boards			
Suction cup type	488-K		388	
diameter in action approx. mm	350		300	
quality of suction cups	rubber red abrasion possible up to 80° C heat resistant from 3 mm glass thickness		black rubber abrasion possible up to 80° C heat resistant from 4 mm glass thickness	
number of suction cups	4	8	4	8
number of extension pieces:	0	4	0	4
safe working load on smooth and clean surface at 60 % vacuum on construction sites outside the EU / in-company kg	500	750	400	750
outer distance of the suction cup approx. mm	840 x 840	1330 x 1950	780 x 790	1280 x 1900
dead weight approx. kg	75	100	73	96
distribution voltage charger for battery	110 - 230 V / 50/60 Hz / 1 phase			
Item No.: 7011-DS7...	-488-0VL	-488-4VL	-388-0VL	-388-4VL
Accessories on request				
Item No.: 488-SCHUTZ	protection cap for suction cup 488			
Item No.: 388-SCHUTZ			protection cap for suction cup 388	
Item No.: 7003-GTWDS7	transport carriage for Kombi 7411-DS7 including extensions			
Item No.: 7003-WSPDS7	rain cover for transport carriage including Kombi 7411-DS7			

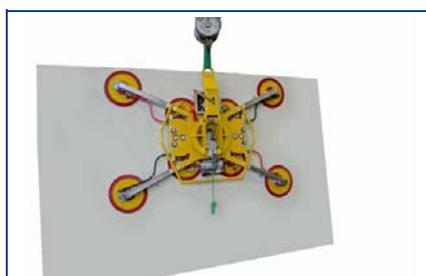


Kombi 7011-DS7 with suction cups 388 and extensions 500 mm

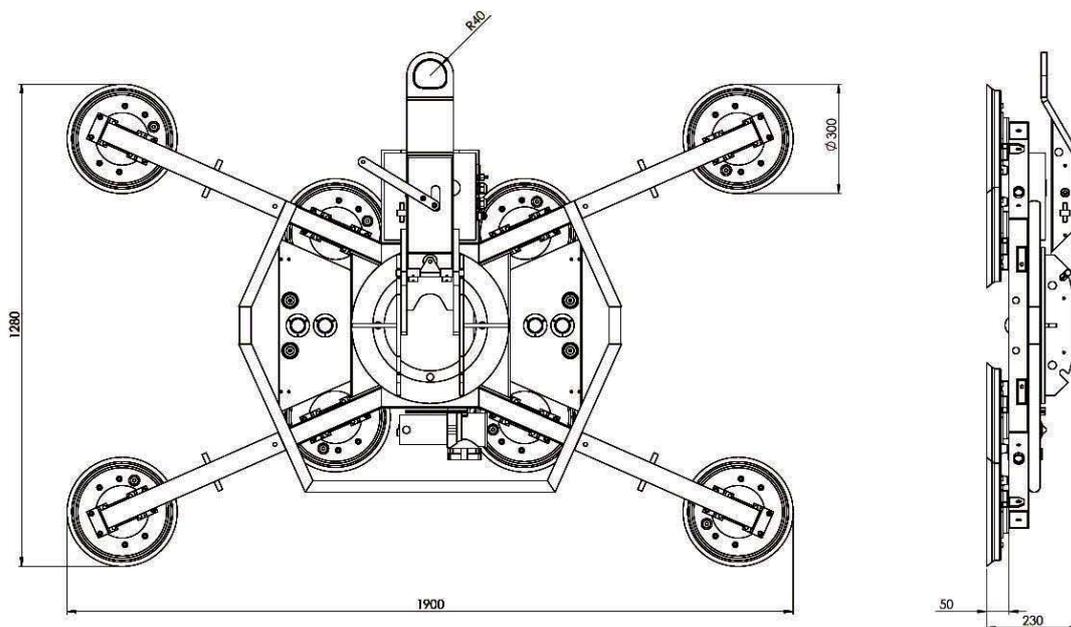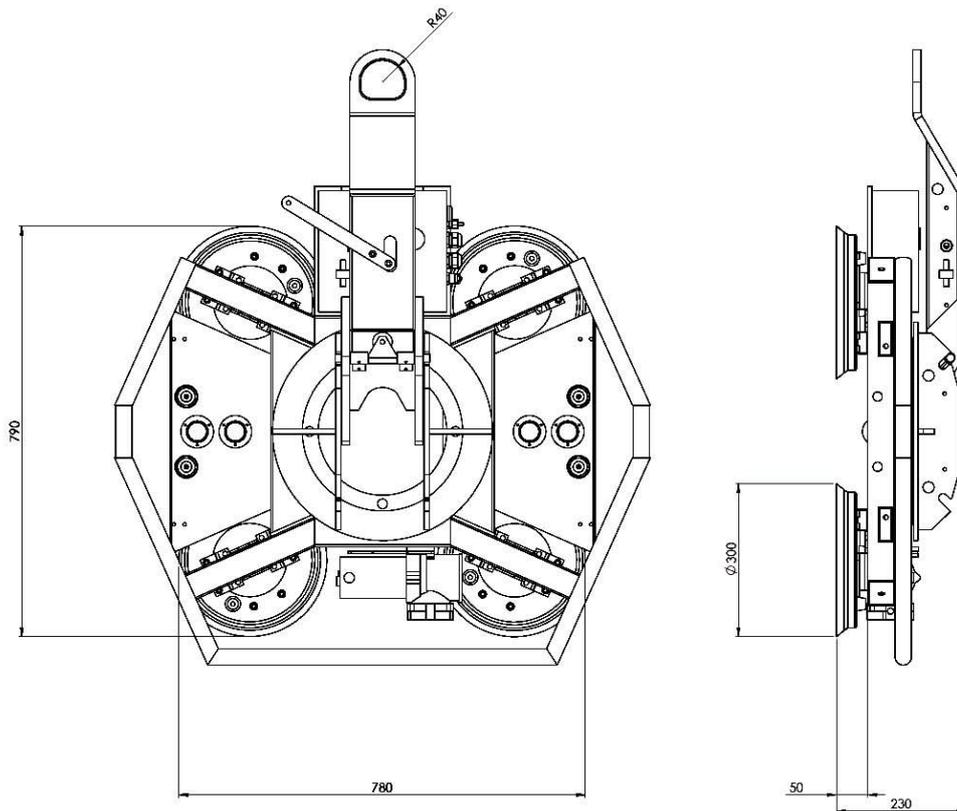

Kombi 7011-DS7 with suction cups 488-K and extensions 500 mm

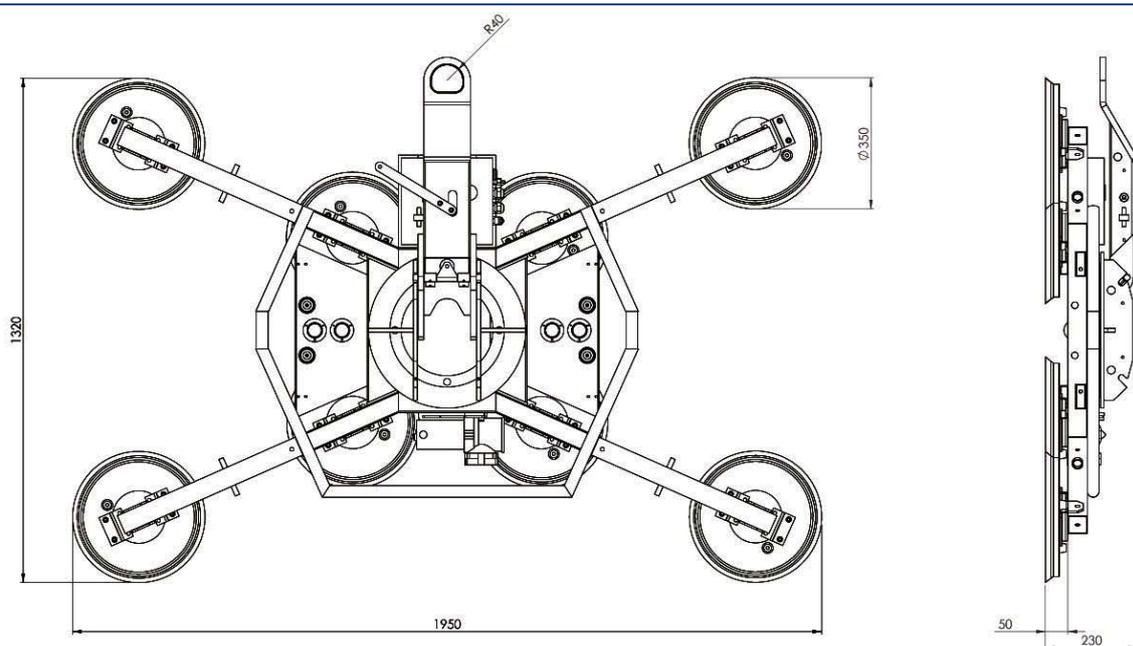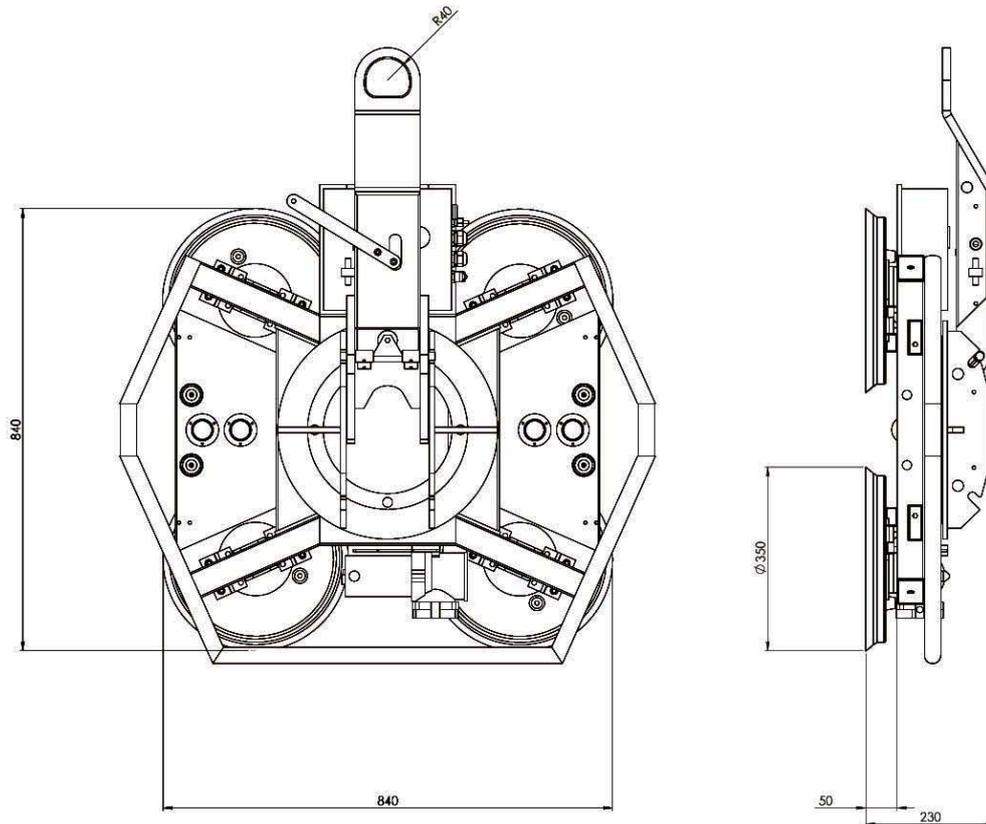

Kombi 7011-DS7 with suction cups 388 and extensions 620 mm

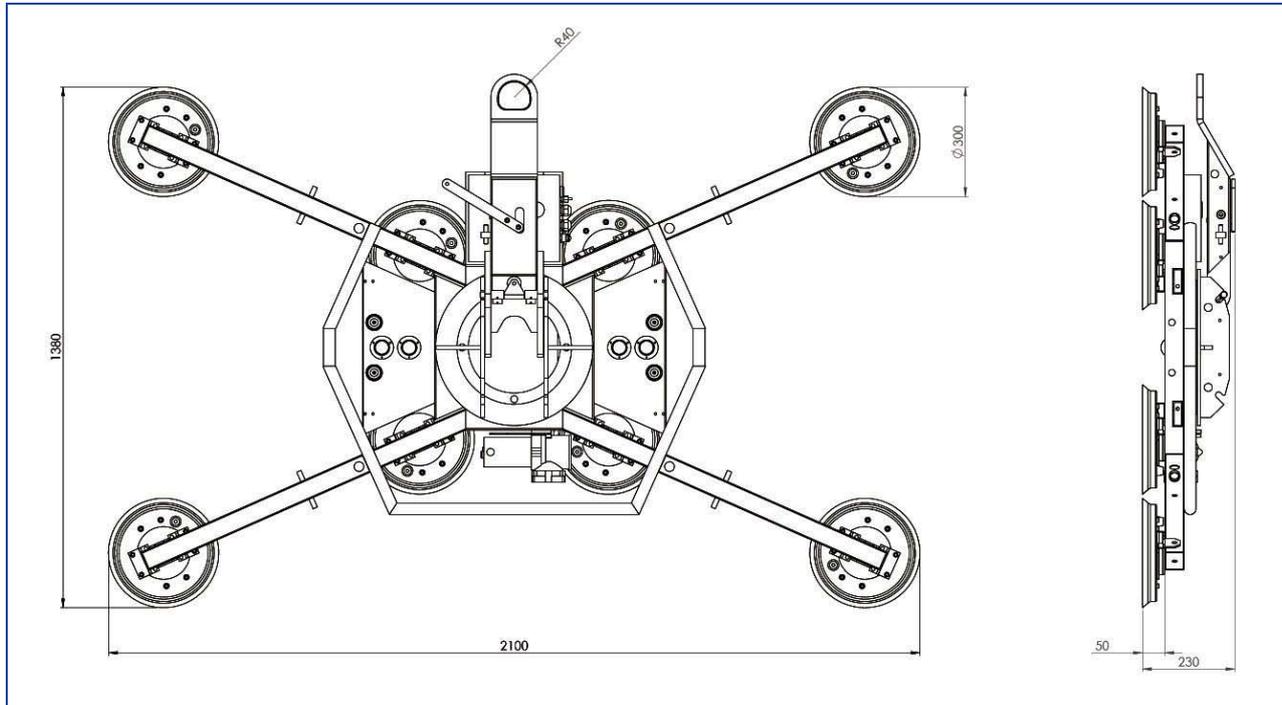

Kombi 7011-DS7 with suction cups 488-K and extensions 620 mm

