







Accu-Device Kombi 7211-ADS

Developed for operation
on the construction site
within the EC
according to EN 13155

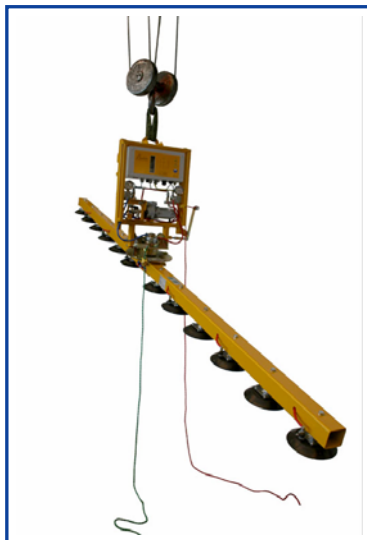

	vertical
	horizontal
	turning through +/- 90 degrees
	tilting through 90 degrees

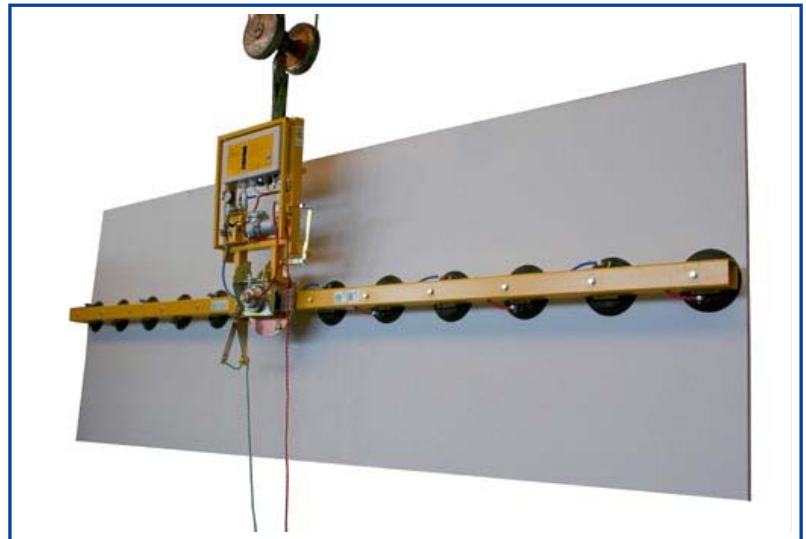

for lifting and transporting of narrow, long strips
manual turning through ± 90 degrees
manual tilting through 90 degrees

Description

- **increased safety via 2 independent vacuum circuits**
each vacuum circuit is designed with 2-fold safety
- **according to EN 13155 & prEN 13035-1 & prEN 13035-2**
- each vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **2 completely closed vacuum circuits**
prevent loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- **power failure monitoring system**
- single row arrangement of suction cups
- fixed suction cup spacing
- all suction cups lockable individually
- turning device ($-90^{\circ}/0^{\circ}/+90^{\circ}$)
with ball bearing turning bolt and locking device
- tilting device (0° to 90°) with locking device every 15°

Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

Control Means

- ON/OFF directly at the device
- SUCTION/RELEASE via hand valve at the device
optional
via cable remote control
optional
via infrared remote control

Suspension: crane eye at the carrying frame
Safe Working Load: 240 / 350 kg
Colour: yellow / partly zinked

suitable for lifting		
material properties		gas-tight
surface		smooth
e. g.		glass panes, sealed units, window and curtain walling elements, plastic and ceramic plates, coated boards
suction cup type		540
diameter	in action approx. mm	200
quality of suction cups		black rubber abrasion possible up to 100° C heat resistant
number of suction cups		2 x 6
safe working load		
on smooth and clean surface at 60 % vacuum		
at EC construction sites	kg	240
in-plant	kg	350
dead weight	approx. kg	
output		1.5 m³/h
voltage	charger for battery	230 Volt 50/60 Hz 1Ph
Item No.: 7211-ADS...		06-0910
voltage	charger for battery	110 Volt 50/60 Hz 1Ph
Item No.: 7211-ADS...		06-0910-110

other frame sizes		on request
--------------------------	--	------------

Accessories on request

Item No.: 388-SCHUTZ		protection cap for suction cup 388
Item No.: 7003-BK/2K		cable remote control → SUCTION/RELEASE
Item No.: 7003-IR2S/2K		infrared remote control → SUCTION/RELEASE
Item No.: 7003-BF/2K		infrared remote control → SUCTION/RELEASE only outside the EC
Item No.: 7003-WL		large warning lamp (flash light for collecting failures)

