


Frame 7000-A-1000

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155**

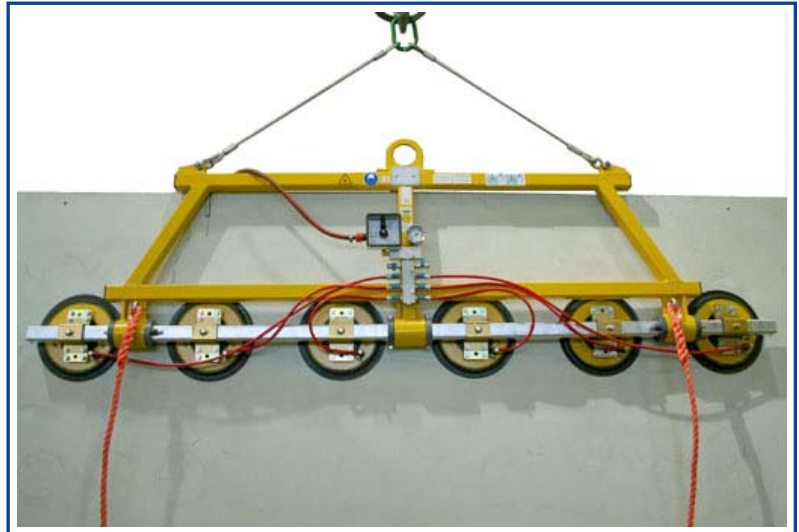

for lifting and transporting
the **perfect** device for the warehouse

- for versatile application
- optimal and space saving handling

Description

- **1-circuit vacuum system**
- control vacuum meter on the device
- single row arrangement of suction cups
- suction cups fixed with movable suspension directly to the carrying bar
- distance of suction cups can be adjusted
- all suction cups lockable individually
- modular device construction
- vertical transport approx. 85°

Vacuum Generation


- external vacuum generation necessary
e. g. via a Pannkoke Compound Pump 7002-COMP2
in the craneway

Control Means

- **SUCTION/RELEASE** via hand valve at the device
or
via remote control
of the vacuum generation

Suspension: crane eye at the carrying frame
Safe Working Load: 1000 kg
Colour: yellow / partly zinked

By simple turning of the carrying bar the device can also be used for horizontal lifting and picking-up/depositing large sheets (horizontal to vertical/vertical to horizontal).

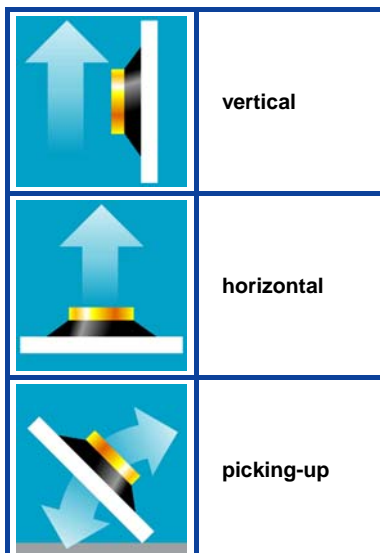

suitable for lifting			
material properties	gas-tight		
surface	smooth		
e. g.	glass panes, insulation glass units, plastic and ceramic plates, coated boards		
suction cup type	388		
diameter in action approx. mm	300		
quality of suction cups	black rubber abrasion possible up to 100° C heat resistant		
length of carrying frame approx. mm	3000	4500	6000
longitudinal-carrying bar length max. approx. mm	4000	5000	6000
number of suction cups	6	8	12
safe working load on smooth and clean surface at 60 % vacuum kg	600	800	1000
vacuum infeed connection quick release coupling	9 mm		
dead weight approx. kg			
Item No.: 7000-A-1000...	I-0920	II-0920	III-0920
Special Design	on request		
Accessories on request			
Item No.: 388-SCHUTZ	protection cap for suction cup 388		
Item No.: 7003-SchutzA	guard grating (size in accordance to your requirement)		
Item No.: 7003-UStA	support for just sealed units (size in accordance to your requirement)		

