


Accu-Device Kombi 7011-ADS SO02

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155**

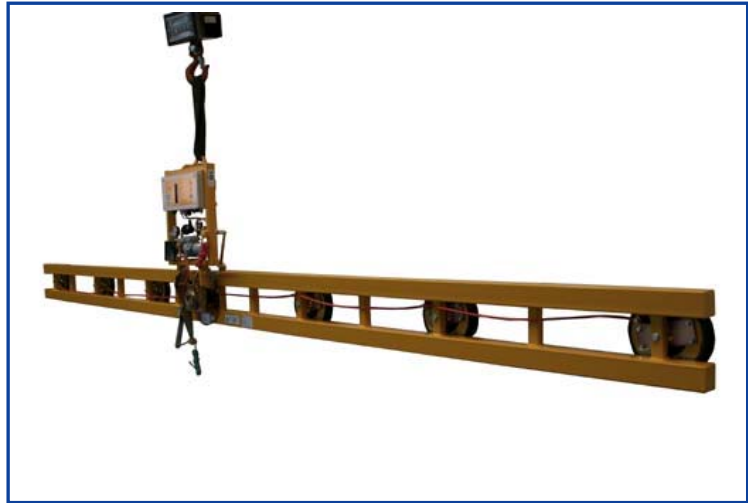

**for lifting and transporting of narrow, long strips
manual turning through ± 90 degrees
manual tilting through 90 degrees**

perfect for glazing of conservatories

Description





- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit**
prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- single row arrangement of suction cups
- suction cups fixed directly on the carrying bar
- adjustable distance between the suction cups via movable carrying bars
- all suction cups lockable individually
- turning device ($-90^{\circ}/0^{\circ}/+90^{\circ}$)
with ball bearing turning bolt and locking device
- tilting device (0° to 90°) with locking device every 15°

Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

Control Means

- ON/OFF directly at the device
 - SUCTION/RELEASE via hand valve at the device
optional
via cable remote control
optional
via infrared remote control
crane eye at the carrying frame
- Suspension:**
Safe Working Load: 400 kg
Colour: yellow / partly zinked

	vertical
	horizontal
	turning through +/- 90 degrees
	tilting through 90 degrees

suitable for lifting	
material properties	gas-tight
surface	smooth
e. g.	glass panes, insulation glass units, plastic and ceramic plates, coated boards
suction cup type	388
diameter in action approx. mm	300
quality of suction cups	rubber black abrasion possible up to 100° heat resistance
number of suction cups	6
safe working load on smooth and clean surface at 60 % vacuum	kg 400
dead weight approx. kg	
vacuum infeed connection	9 mm
output	1.5 m³/h
voltage charger for battery	230 Volt 50/60 Hz 1Ph
Item No.: 7011-ADS SO02...	6-0910
voltage charger for battery	110 Volt 50/60 Hz 1Ph
Item No.: 7011-ADS SO02...	6-0910-110

Accessories on request

Item No.: 388-SCHUTZ	protection cap for suction cup 388
Item No.: 7003-BK/DS	cable remote control → SUCTION/RELEASE
Item No.: 7003-IR2S	infrared remote control → SUCTION/RELEASE
Item No.: 7003-BF/DS	infrared remote control → SUCTION/RELEASE only outside the EC

Also available as 2-circuit vacuum lifting device (Type 7211-ADS SO02)
in accordance to EN 13155 / prEN 13035.

