


Accu Device Kombi 7011-H2000

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155.**



horizontal

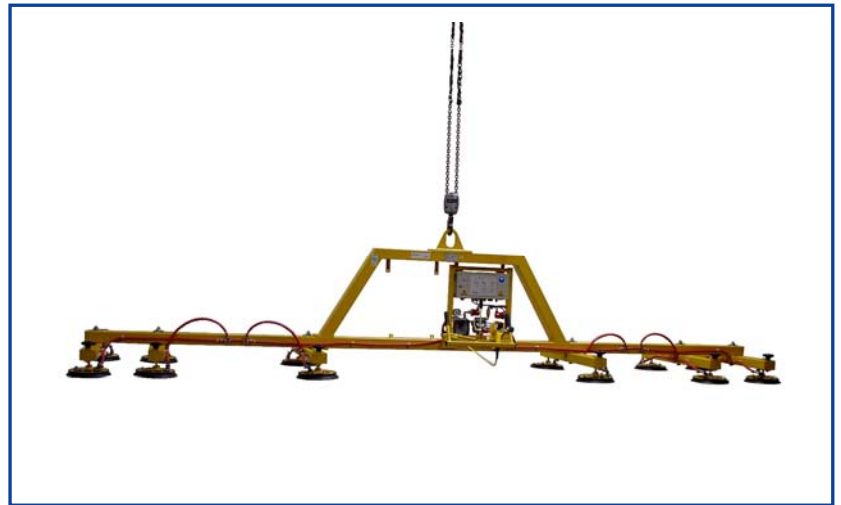

for horizontal lifting and transporting

Description

- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit** prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- multiple row arrangement of suction cups
- cross carrying bars adjustable via cross clamps in longitudinal and vertical direction
- suction cups fixed with movable suspension directly to the cross carrying bar
- distance of suction cups can be adjusted
- all suction cups lockable individually
- modular device construction
- guide bows
- holder for crane switch

Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

Control Means

- ON/OFF directly at the device
- SUCTION/RELEASE via hand valve at the device
or
via cable remote control
optional
via infrared remote control

Suspension: crane eye at the carrying frame
Safe Working Load: 2000 kg
Colour: yellow / partly zinked

suitable for lifting				
material properties	gastight			
surface	smooth			
e. g.	glass panes, plastic and ceramic plates, coated boards, metal sheets			
suction cup type	388	540	540	542/37
diameter in action approx. mm	300	200	200	400
suction cup quality	rubber black abrasion possible upto 100° heat resistance			
number of suction cups	8	6	12	10
length of carrying frame approx. mm	4500	1500	6000	2000
width of the device approx. mm	2000	900	1000	800
number of cross carrying bars	4	3	6	5
safe working load on smooth and clean surface at 60 % vacuum kg	800	260	650	2000
dead weight approx. kg	170	120	180	160
output	1,5 m³/h			
voltage charger for battery	230 Volts 50 Hz			
item-no.: 7011-H2000...	8-0910	6-0920	12-0920	10-
voltage charger for battery	110 Volts 50 Hz			
item-no.: 7011-H2000...	8-0910-110	6-0920-110	12-0920-110	10- -110
Special Design and Special Voltage	on request			
Accessories on request				
item-no.: 388-SCHUTZ	protection cap for suction cup 388			
item-no.: 540-SCHUTZ	protection cap for suction cup 540			
item-no.: 7003-DSFUS2	infrared remote control → SUCTION/RELEASE			
item-no.: 7003-DSFUST	infrared remote control → SUCTION/RELEASE only outside the EC			

Also available as 2-circuit vacuum lifting device (Type 7211-H2000)
in accordance to EN 13155 / prEN 13035.

