
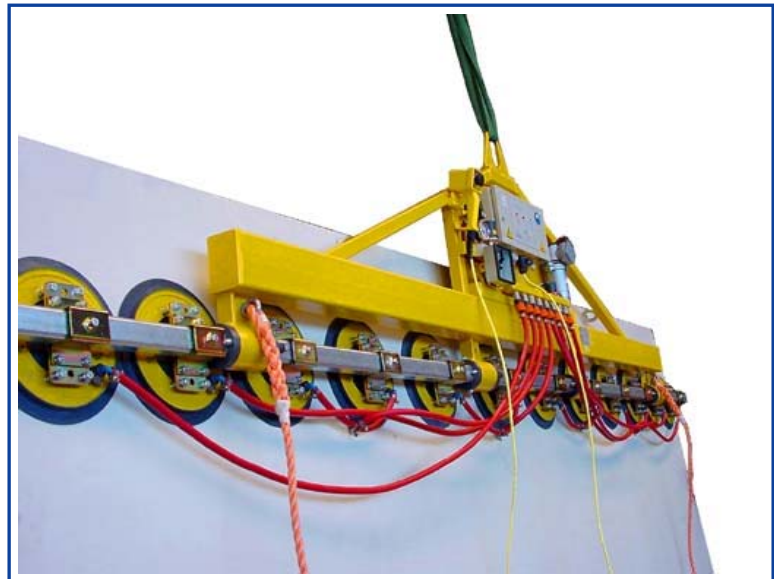
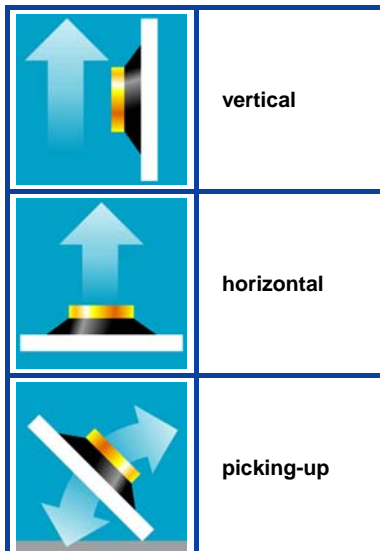


Accu Device Kombi 7011-AH

**For operation on
EC construction sites only
permissible with
mechanical holding device
according to
EN 13155.**

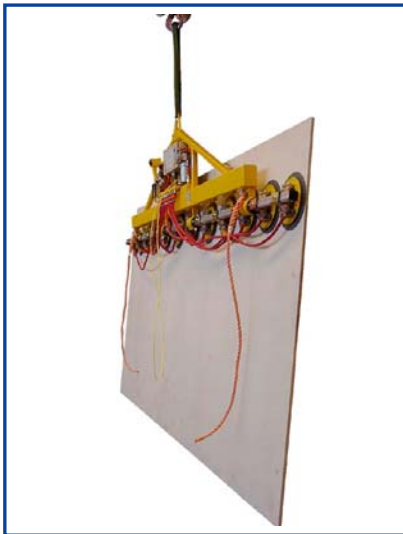

for vertical lifting and transporting
the **perfect** device for construction site and warehouse

Description

- **1-circuit vacuum system**
- the vacuum circuit has a vacuum tank with nonreturn valve, vacuum switch and control vacuum meter
- **completely closed vacuum circuit**
prevents loss of vacuum at power failure
- warning lamp and acoustic signal indicate insufficient vacuum
- single row arrangement of suction cups
- suction cups fixed with movable suspension bar directly to the carrying bar
- distance of suction cups can be adjusted
- all suction cups lockable individually
- vertical transport approx. 85°

Vacuum Generation

- built-in low maintenance rechargeable battery vacuum pump (dry running system)
- for rechargeable battery and line operation without change-over
- built-in accumulator charger for charging over night
- no change of rechargeable battery necessary
- no cable - no hose

Control Means

- **SUCTION/RELEASE** via hand valve at the device
or
via cable remote control
optional
via infrared remote control

Suspension: crane eye at the carrying frame
Safe Working Load: 1200 kg
Colour: yellow / partly zinked

By simple turning of the carrying bar the device can also be used for horizontal lifting and picking-up/depositing large sheets (horizontal to vertical/vertical to horizontal).

suitable for lifting	
material properties	gastight
surface	smooth
e. g.	glass panes, sealed units, plastic and ceramic plates, coated boards
suction cup type	388
diameter in action approx. mm	300
suction cup quality	rubber black abrasion possible upto 100° heat resistance
number of suction cups	12
carrying bar length approx. mm	4000
safe working load on smooth and clean surface at 60 % vacuum kg	1200
dead weight approx. kg	230
structural depth approx. mm	270
output	1,5 m³/h
voltage charger for battery	230 Volts 50 Hz
item-no.: 7011-AH...	0920
voltage charger for battery	110 Volts 50 Hz
item-no.: 7011-AH...	0920-110
Special Design and Special Voltage	on request
Accessories on request	
item-no.: 388-SCHUTZ	protection cap for suction cup 388
item-no.: 7003-DSFUS2	infrared remote control → SUCTION/RELEASE
item-no.: 7003-DSFUST	infrared remote control → SUCTION/RELEASE only outside the EC
item-no.: 7003-SchutzA	guard grating (size in accordance to your requirement)
item-no.: 7003-UStA	support for just sealed units (size in accordance to your requirement)

Also available as 2-circuit vacuum lifting device (Type 7211-AH)
in accordance to EN 13155 / prEN 13035.

